

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 130 717
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 84304008.0

(51) Int. Cl.: **H 04 N 17/02**


(22) Date of filing: 14.06.84

(30) Priority: 15.06.83 US 504569

(71) Applicant: **TEKTRONIX, INC.**, Tektronix Industrial Park
P.O. Box 500, Beaverton Oregon 97077 (US)(43) Date of publication of application: 09.01.85
Bulletin 85/2(72) Inventor: **Matney, Earl G.**, 2001 Oak Drive, Newberg
Oregon 97132 (US)(84) Designated Contracting States: **DE FR GB NL**(74) Representative: **Baillie, Iain Cameron et al**, c/o Ladas &
Parry Isartorplatz 5, D-8000 München 2 (DE)

(54) Apparatus for displaying the phase and amplitude of a chrominance signal.

(57) Apparatus for displaying in polar coordinates the relative phase and amplitude of a chrominance signal comprises a display device, such as a CRT display device (16), having a circuit (26) for adjusting the brightness of the light dot. The apparatus also comprises a circuit (22, 24) for generating a blanking signal and applying it to the adjustment circuit (26) in the event that the amplitude of the chrominance signal is below a predetermined value.

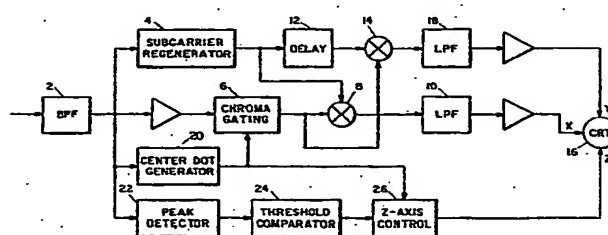

EP 0 130 717 A1

ACTORUM AG

APPARATUS FOR DISPLAYING THE PHASE AND AMPLITUDE
OF A CHROMINANCE SIGNAL

This invention relates to apparatus for displaying the phase and amplitude of a chrominance signal.

Background of the Invention

5 It is conventional to use a vectorscope including a cathode ray tube (CRT) to display in polar coordinates the phase and amplitude of a chrominance signal, the amplitude of the signal being represented by the radial coordinate and the phase relative to burst
10 being represented by the angular coordinate. A consequence of this display format is that the light dot of the CRT remains at the same position on the CRT screen if the amplitude of the chrominance signal is zero, or below some small value, regardless of the value of the
15 relative phase. Consequently, when the duty cycle of the display is low, or the signal is predominately of low amplitude, the center spot is by far the brightest area of the display. This leads to problems in use, such as poor viewability and difficulty in identifying
20 the precise location of the center dot owing to haloming, and also gives rise to the danger that the phosphor of the CRT might be damaged.

Summary of the Invention

25 According to the present invention there is provided apparatus for displaying in polar coordinates the relative phase and amplitude of a chrominance signal, comprising a display device having a display surface, means for generating a light dot on the
30 display surface, means for deflecting the light dot in two predetermined, mutually perpendicular directions over the display surface in such manner that, regardless of relative phase, the light dot remains at the same position if the amplitude of the chrominance

signal has a predetermined value or lies within a predetermined range of values, and means for adjusting the intensity of the light dot, the apparatus also comprising means for generating a blanking signal and applying it to the adjusting means of the display device in the event that the amplitude of the chrominance signal has said predetermined value or lies within said predetermined range of values.

10

Brief Description of the Drawings

For a better understanding of the invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawing, in which:

15

FIG. 1 is a block diagram of a vectorscope, and

FIG. 2 illustrates waveforms obtained at various points of FIG. 1.

20

Detailed Description

The vectorscope illustrated in FIG. 1 comprises a bandpass filter 2 which is tuned to the frequency of the color subcarrier and thus selects the chrominance frequency from an input video signal. The output of the bandpass filter 2 is applied in conventional manner to a subcarrier regenerator 4 which locks to the color burst of the video signal and generates a continuous wave signal synchronized with burst. The chrominance signal is in addition applied through a chroma gating circuit 6 to a demodulator 8 which receives the regenerated burst signal and provides at its output the demodulated chrominance signal. The demodulated chrominance signal is passed through a low pass filter 10 to the horizontal deflection amplifier of a CRT 16. The output of the subcarrier regenerator 4 is delayed by 90° (one-quarter period of the burst signal) by a

35

delay line 12 and is applied to a second demodulator 14 which also receives the output signal of the chroma gating circuit 6. The output signal of the demodulator 14 represents the phase of the chrominance signal relative to burst, and is applied to the vertical deflection amplifier of the CRT 16 through a low pass filter 18.

The chroma gating circuit 6 operates under control of a center dot generator circuit 20 to provide a center dot in the event that the input signal is a continuous wave signal, i.e., one in which there is no interval during which the amplitude of the chrominance signal is zero. The center dot is provided by repeatedly grounding the output of the chroma gating circuit 6 independently of the amplitude of the input signal. The timing for the grounding operation is established by the circuit 20.

The output of the filter 2 is also applied to a peak detector 22 which provides at its output a signal which follows the envelope of the input signal. The peak detector is designed to respond rapidly to increasing amplitude of chrominance and slowly to decreasing amplitude of chrominance. The envelope signal provided by the peak detector 22 is applied to a threshold comparator 24. The output signal of the threshold comparator goes high when the envelope signal increases through a first threshold level and goes low when the envelope signal falls below a second, lower threshold value. Thus, the comparator 24 introduces hysteresis into the output of the peak detector.

The output of the threshold comparator 24 is applied to a Z-axis control circuit 26, which controls the beam current of the CRT 16. Beam current is

provided to the CRT so long as the output signal of the threshold comparator is high. The Z-axis control circuit also responds to the center dot generator circuit 20 to insure that the center dot is not completely blanked. Thus, the circuit 20 repeatedly overrides the output of the threshold comparator 24 and thereby insures that the CRT display includes a center dot, but the dot is much fainter than it would be if the peak detector and threshold comparator were omitted.

The rapid response of the peak detector to increasing amplitude of chrominance, together with the delay introduced by the low pass filters, insures that unblanking takes place in time to view vector transitions.

FIG. 2 illustrates in simplified form the manner of operation of the peak detector and threshold comparator. The waveform A illustrated in FIG. 2 represents the input to the peak detector during the back porch of the horizontal synchronizing interval of a composite video signal, and thus includes the color burst. The waveform B represents the envelope signal provided at the output of the peak detector, while the waveform C represents the output of the threshold comparator. The first and second threshold levels are shown in FIG. 2 against the waveform B.

It will be appreciated that the invention is not restricted to the particular circuit which has been described and illustrated, since variations may be made therein without departing from the scope of the invention as defined in the appended claims, and equivalents thereof.

Claims

1. Apparatus for displaying in polar coordinates the relative phase and amplitude of a chrominance signal, comprising a display device (16) having a display surface, means (20) for generating a light dot on the display surface, means (X, Y) for deflecting the light dot in two predetermined, mutually perpendicular directions over the display surface in such manner that, regardless of relative phase, the light dot remains at the same position if the amplitude of the chrominance signal has a predetermined value or lies within a predetermined range of values, and means (26) for adjusting the intensity of the light dot, the apparatus also comprising means (20, 24) for generating a blanking signal and applying it to the adjusting means of the display device in the event that the amplitude of the chrominance signal has said predetermined value or lies within said predetermined range of values.

2. Apparatus according to claim 1, wherein the means for generating the blanking signal comprise a peak detector (22) for generating a signal representing the envelope of the chrominance signal and a threshold comparator (24) for receiving the envelope signal and providing said blanking signal to the adjusting means of the display device (16).

3. Apparatus according to claim 2, wherein the display device includes a center dot generator circuit (20) which is operative to override repeatedly the blanking signal so as to insure that the light dot is not fully blanked when the chrominance signal has said predetermined value or lies within said predetermined range of values.


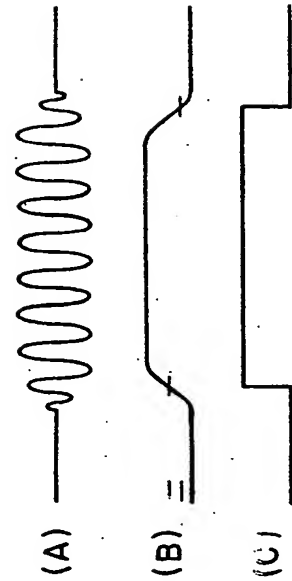


FIG. 2

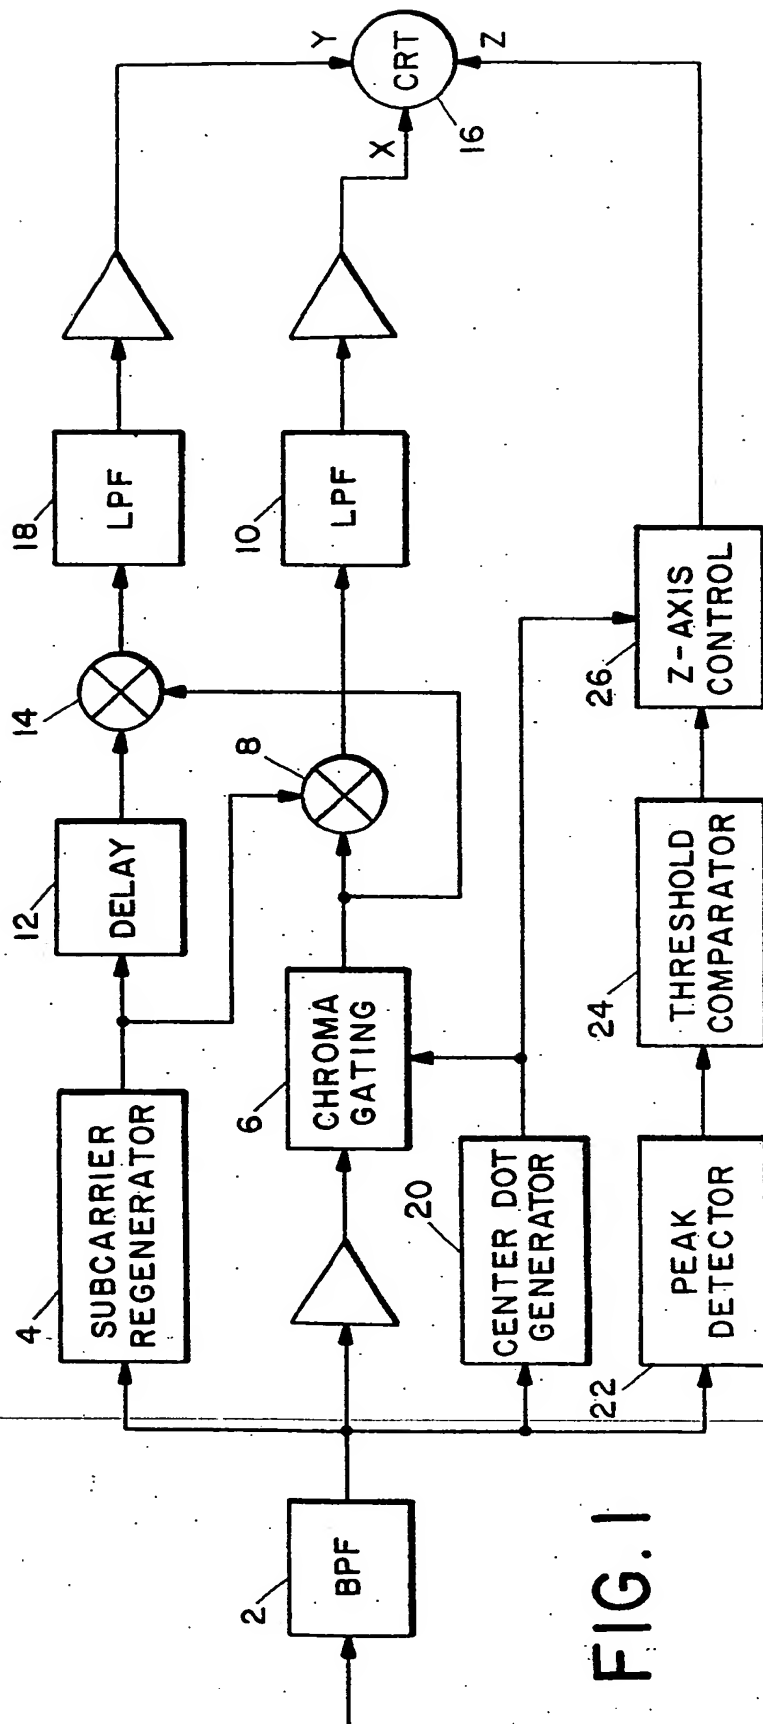

European Patent
Office

EUROPEAN SEARCH REPORT

0130717
Application number

EP 84 30 4008

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 9)
A	DE-B-1 149 742 (FERNSEH GmbH) * the whole document *	1	H 04 N 9/62
A	US-A-3 614 304 (SCHONFELDER)	1	
A	CH-A- 516 164 (LICENTIA)	1	
A	US-A-3 502 937 (BADER et al.)	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 9)
			H 04 N 9/62 G 01 R 13/20 G 01 R 13/26
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24-09-1984	Examiner SIX G.E.E.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503 03/82